
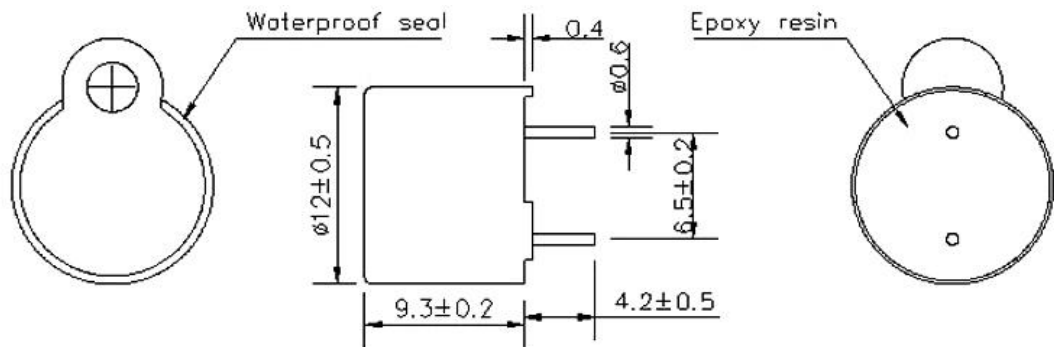


| SPECIFICATION | | |
|---------------|---------------------------------------|----------------------------|
| 1 | Model No. | EET1295-050-2.048-40-6.5-R |
| 2 | Rated Voltage (V) | 5 |
| 3 | Operating Voltage (V) | 4.5~5.5 |
| 4 | Resonant Frequency (Hz) | 2048 |
| 5 | Coil Resistance (Ω) | 40 \pm 5 |
| 6 | *Sound Output at 10cm (dB) | \geq 85 |
| 7 | *Current Consumption (mA) | \leq 60 |
| 8 | Operating Temperature ($^{\circ}$ C) | -20~+70 |
| 9 | Storage Temperature ($^{\circ}$ C) | -30~+80 |
| 10 | Weight (g) | 1.3 |
| 11 | Rohs | Yes |


THIS DOCUMENT CONTAINS DATE PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH CO LTD. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS CHANGZHOU ESUNTECH CO LTD IS PROHIBITED.
©2003, Project Changzhou Esuntech Co Ltd

| REVISION HISTORY | | | |
|------------------|---------------------------|-----------|----------|
| LTR | DESCRIPTION | DATE | APPROVED |
| - | RELEASED FROM ENGINEERING | 9/23/2003 | Y M |
| A | | | |
| B | | | |
| C | | | |

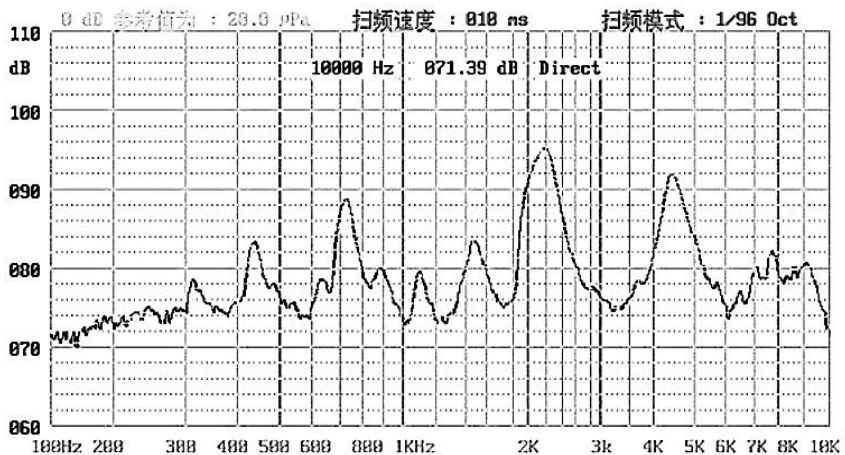

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS
2. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

| | | | | | | | |
|------|---|------|------------|------|-------------|------|-------------|
| SIZE | Designed by | Date | Checked by | Date | Approved by | Date | Drawed date |
| |  Changzhou Esuntech Co., Ltd http://www.esuntech.com.cn | | | | | | |
| A4 | | | | | | | |