
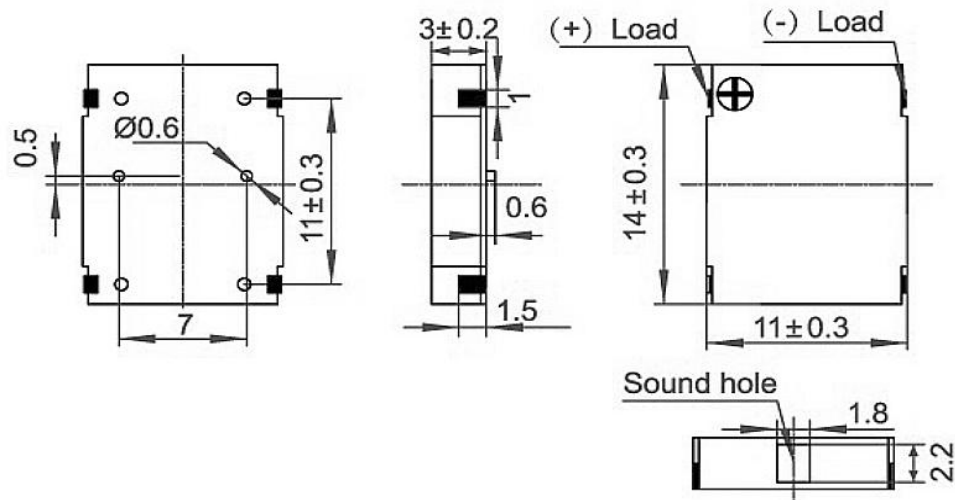
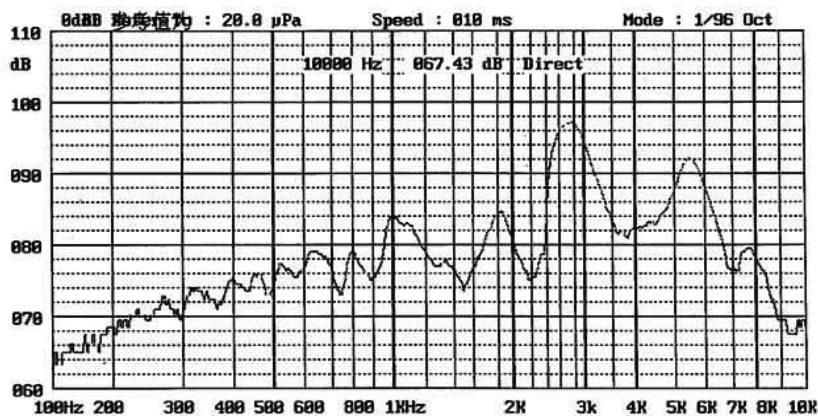


| SPECIFICATION | | |
|---------------|----------------------------|--------------------------|
| 1 | Model No. | EET1411AS-05L-2.731-40-R |
| 2 | Rated Voltage (V) | 5 |
| 3 | Operating Voltage (V) | 3~7 |
| 4 | Rated Current (mA) | ≤100 |
| 5 | Resonance Frequency (Hz) | 2731 |
| 6 | Coil Resistance (Ω) | 40±4 |
| 7 | *Sound Output at 10cm (dB) | ≥90 |
| 8 | *Current Consumption (mA) | ≤40 |
| 9 | Operating Temperature (°C) | -20~+70 |
| 10 | Storage Temperature (°C) | -30~+80 |
| 11 | Weight (g) | 0.3 |
| 12 | Housing Material | LCP |


THIS DOCUMENT CONTAINS DATE
 PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH
 CO LTD. ANY USE OR REPRODUCTION, IN ANY FORM,
 WITHOUT PRIOR WRITTEN PERMISSION OF
 PROJECTS CHANGZHOU ESUNTECH CO LTD
 IS PROHIBITED.
 ©2003, Project Changzhou Esuntech Co Ltd

| REVISION HISTORY | | | |
|------------------|---------------------------|-----------|----------|
| LTR | DESCRIPTION | DATE | APPROVED |
| - | RELEASED FROM ENGINEERING | 9/23/2003 | Y M |
| A | | | |
| B | | | |
| C | | | |

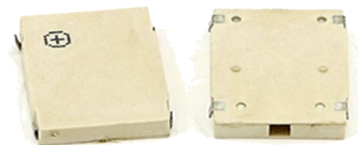

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS
2. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

| SIZE | Designed by | Date | Checked by | Date | Approved by | Date | Drawed date |
|------|---|------|------------|------|--------------------------|---------|-------------|
| A4 |  Changzhou Esuntech Co.,Ltd http://www.esuntech.com.cn | | | | EET1411AS-05L-2.731-40-R | | |
| | | | | | TRANSDUCER | Edition | Sheet |