




SPECIFICATION		
1	Model No.	EUS16T-40TR-P
2	Construction	Open
3	Using method	Transmitter or receiver
4	Normal Frequency	40kHz
5	SPL	min.110dB(effective Value 10V/30cm)
6	Sensitivity	min.-65dBV/u bar
7	Directivity	50 degrees
8	Capacitance	2000pF+/-20% at 1kHz
9	Detectable Range	0.7~18m
10	Housing material	Aluminum
11	Operating Temp.range	-30~+85 °C
12	Weight(g)	3

THIS DOCUMENT CONTAINS DATE
 PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH
 CO LTD. ANY USE OR REPRODUCTION,IN ANY FORM,
 WITHOUT PRIOR WRITTEN PERMISSION OF
 PROJECTS CHANGZHOU ESUNTECH CO LTD
 IS PROHIBITED.

©2003,Project Changzhou Esuntech Co Ltd




REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
B			
C			

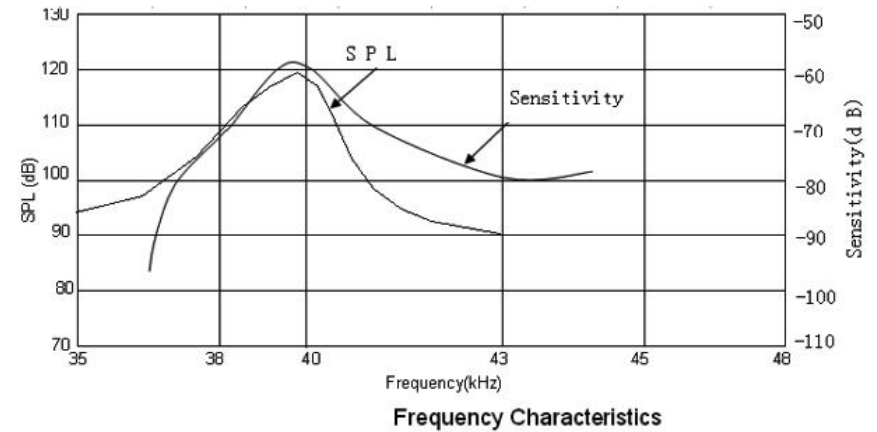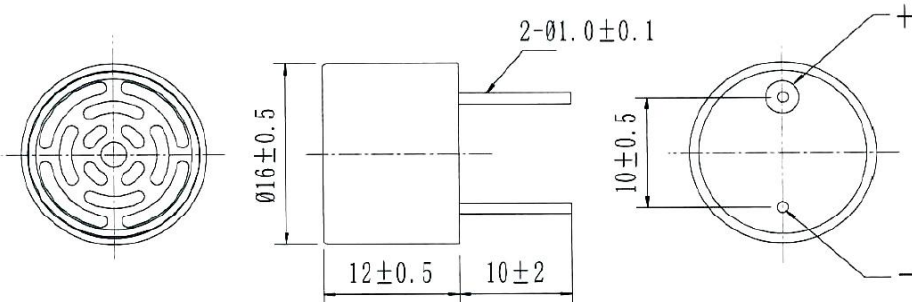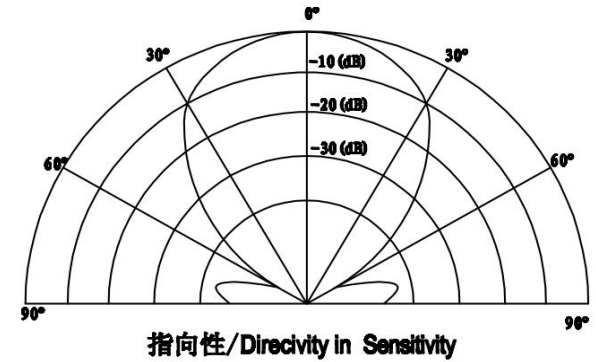

NOTES:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS
- 2.SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
	A4	 Changzhou Esuntech Co.,Ltd http://www.esuntech.com.cn			EUS16T-40TR-P		
	Ultrasonic Sensor				Edition	1 / 1	